

HEADLIGHT BUCKET ASSEMBLY

1. There are 2 complete headlight bucket harnesses included in this kit (510410).
2. Install one bucket harness into each bucket housing and snap the grommet and loom assembly into the hole in that bucket housing. Pass the loose end of each of the bucket harness assemblies thru the LH and RH inner fender panels.
3. Attach each ground wire (with the ring terminal on it) to a good known chassis ground. Make sure that the attaching areas have no 2-stage paint or powder coating on them or the grounds will not transfer, and your headlights will not work.
4. Once the tan and light green wires have been passed through the inner fender panels, you can then install each of the bare terminal ends on the tan and light green wires into the provided loose connectors C maintaining the color continuity as shown above.
5. You will plug these completed bucket harness assemblies into the front light harness (500432) as shown above. Connectors D, terminals B (wider for LH) and A (narrower for RH) have been provided so that you can connect the H/L bucket harnesses into the main front lighting harness.





**American
Autowire**

www.americanautowire.com 856-933-0801

PART # **510410** **K**

**HEADLIGHT & PARKING LAMP
CONNECTION KIT**

92971293 Rev 0.0 3/19/2015

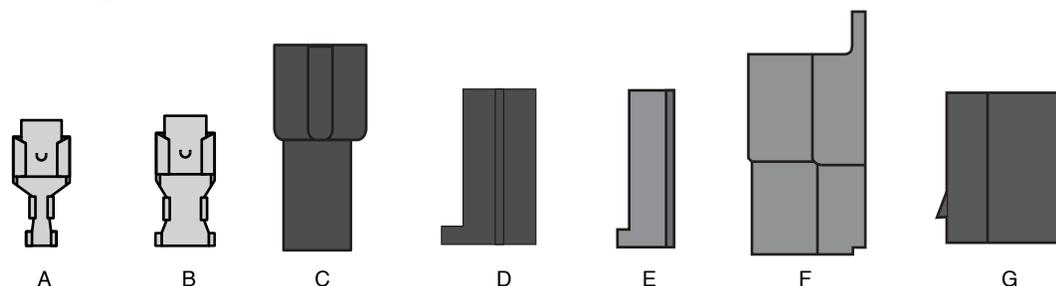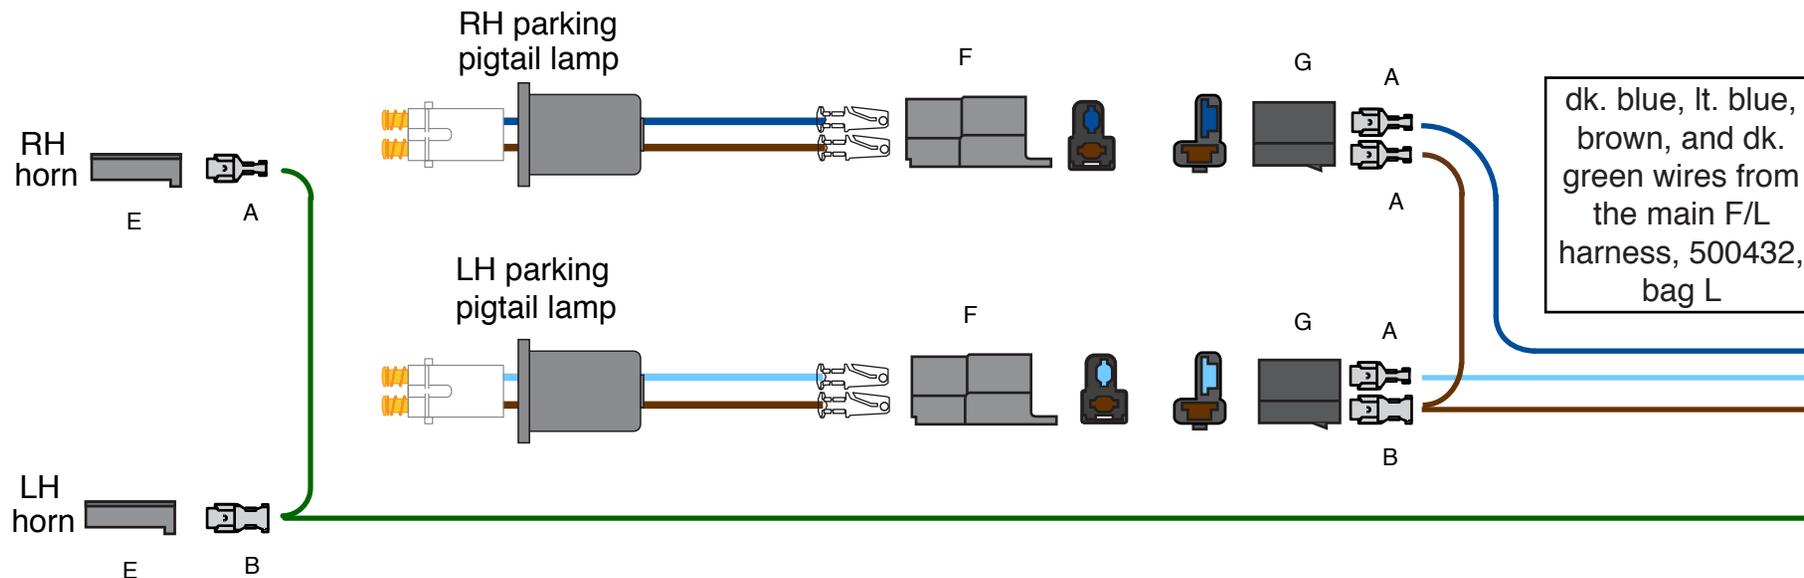

connectors F & G are depicted looking into the open end of the connector assemblies.

Part 8 of Danchuk # 11204 Instructions



**American
Autowire**

www.americanautowire.com 856-933-0801

1. There are 2 complete parking lamp pigtail harnesses included in this kit (510410), a LH one containing lt. blue and brown wires, and a RH one containing dk. blue and brown wires.
2. Install the LH pigtail harness by twisting the lamp socket end into the parking lamp bar and sliding the seal boot over the connection, then repeat this process for the RH side. Once they are installed in the parking lamp bar, you can then install each of the bare terminal ends on the blue and brown wires into the provided loose connectors F maintaining the color continuity as shown above.
3. You will plug these completed pigtail harness assemblies into the front light harness (500432) as shown above. Connectors G, terminals B (wider for LH brown), and A (narrower for the blue wires and the RH brown wire) have been provided so that you can connect the parking lamp harnesses into the main front lighting harness.
4. Connectors E, terminals B (wider for LH), and A (narrower for the RH) have been provided for you to connect the dk. green horn wires found in the (500432) kit to your LH and RH horns.

510410

K

HEADLIGHT & PARKING LAMP
CONNECTION KIT

92971293 Rev 0.0 3/19/2015