

Front console W/o Floor Shift

A professional is recomened for
all TMI Products installs



Tools needed:






PHILLIPS SCREWDRIVER

Metal Screws


TAPE

RAZOR BLADE


Cut Off wheel

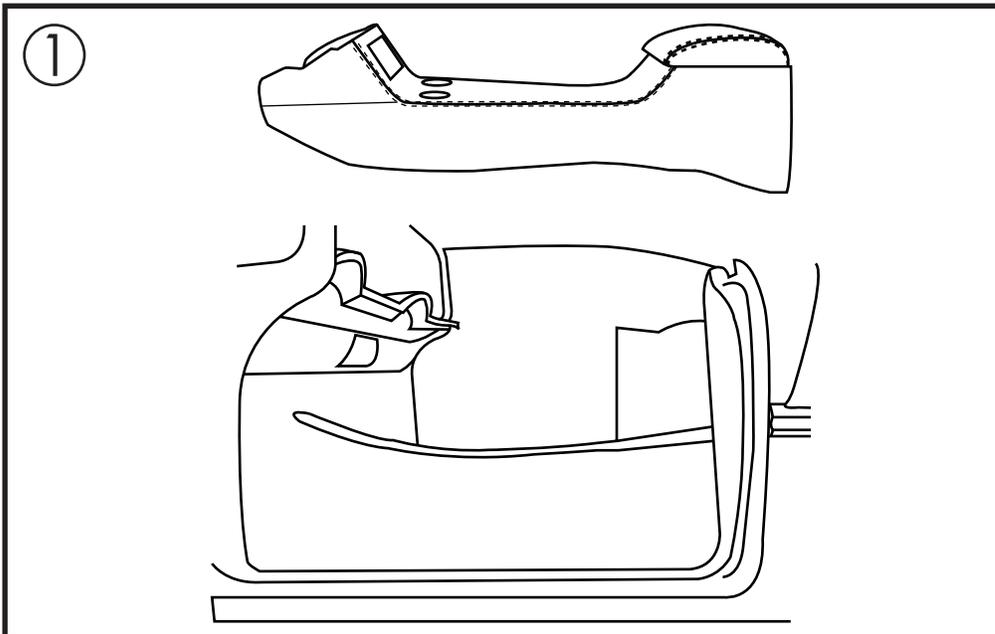


Step 1: The TMI Products Center console will simply sit in between your two bucket seats. It will slide up underneath the dash. If you have a floor shifter please see page 2.

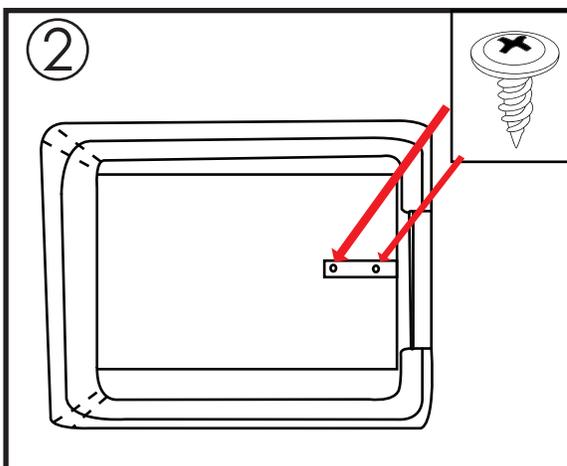


Step 2: Once your TMI Products center console is located in it final position you will lift and remove the bucket in the center console storage compartment. There you will see a tab Resting on the transmission tunnel/floor pan. You will drill two metal screws through the holes in that tab into the trans tunnel/floor pan. Please make sure you have clearance on the other of the tunnel/pan for the screws.

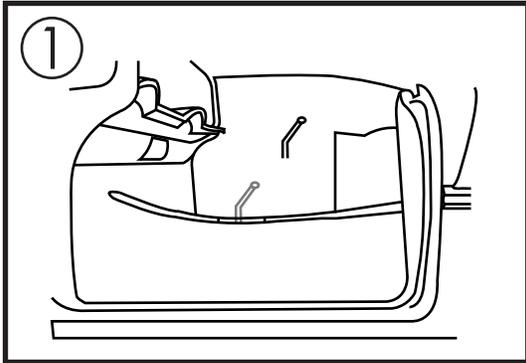


Step 1: You will first have to remove your shifter. This is so that we can lay the console over the shifter location.

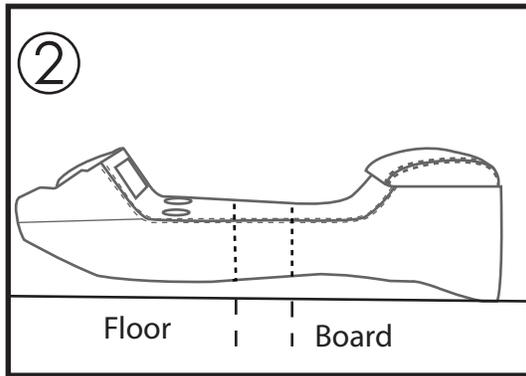


Step 2: Using masking tape you will mark the shifter hole location on the floor board. You will then set the console back down over the shifting linkage. You will use the tape on the tunnel to trace into the topside of the console. Double check with the supplied shifter boot on length your diminsions should be no more than 8 1/2 front to back and 5 1/2 left to right. If the boot is longer than your lines the lengthen you lines for the cup. Just remeber the tape on the floor board is there to give the minimal length needed for your linkage.

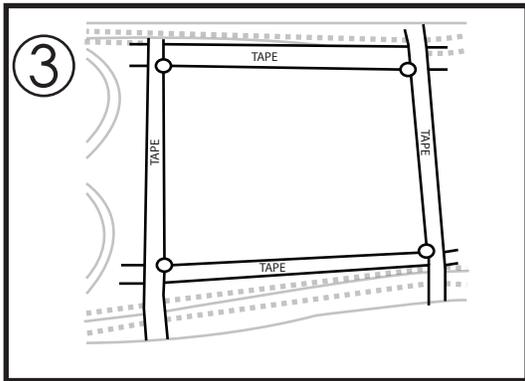



Step 3: Next you will need to drill guide holes. using your masking tape lines drill holes at the corner of your measurment. Start with a 1/8th inch bit the go up to a 1/4 inch bit. Hold the vinyl at each side so the drill bit does not pull the vinyl from the fiberglass.

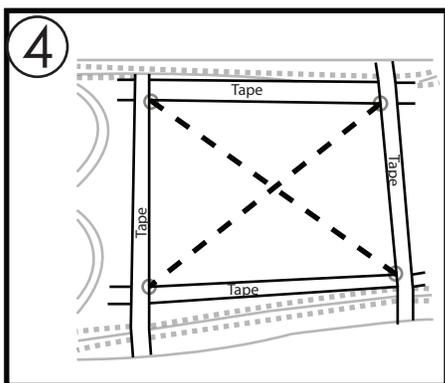

Step 4: Once the guide holes are drilled, cut an "X" on the vinyl to each guide hole so you can peel the vinyl back and tape each vinyl triangle into place reveling the fiber glass

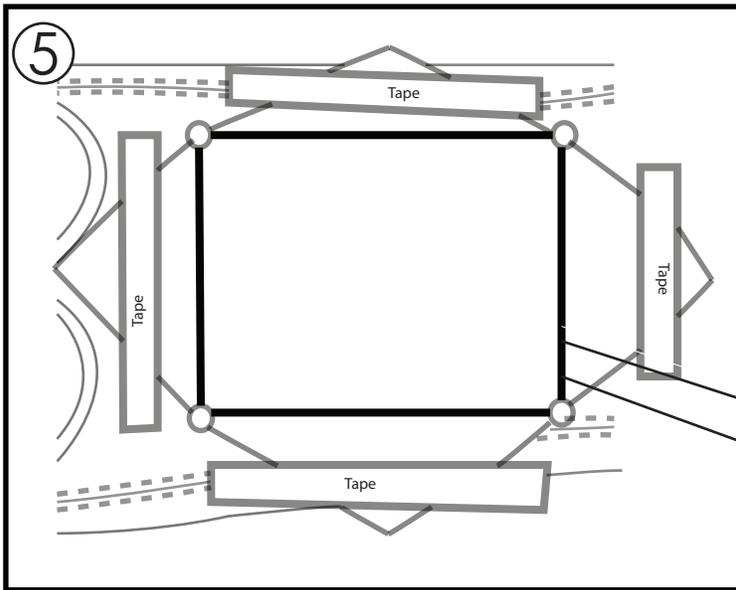

Step 5: Once you have pulled back the vinyl you will need to cut the fiber glass. The best way to do this is to use a cut off wheel to cut at all four corners where your guide holes should be drilled you will cut from each guide hole to the other.

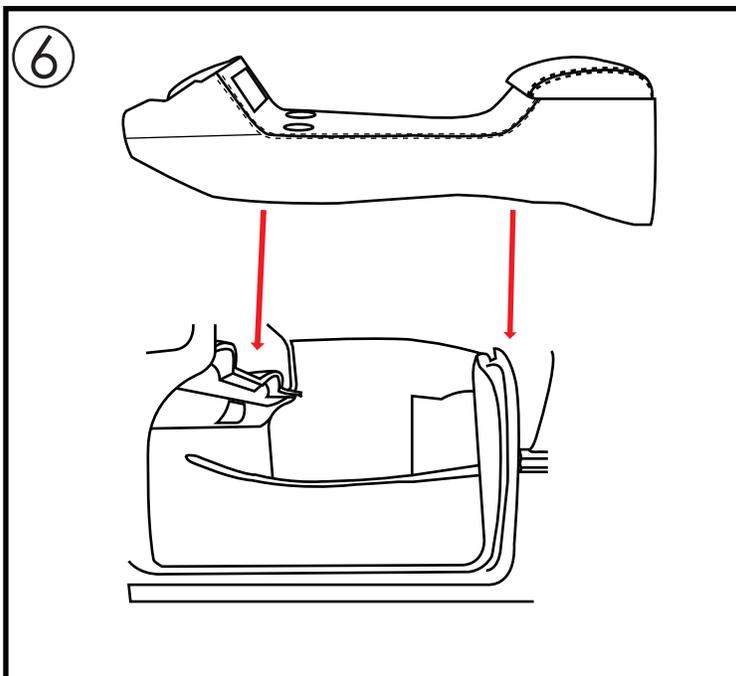

Step 6: after the fiber glass has been cut you can now Re-Install your shifter linkage. You will put the TMI Products center console over your shift linkage. Then with the center console in you will stick your shifter through the console and attach it to the linkage. Then slide the shift boot down the shifter into place on the console. Installing your shift knob last. View page 1 step 2 for final step.