





Tools needed:



DRILL




ADHESIVE SPRAY

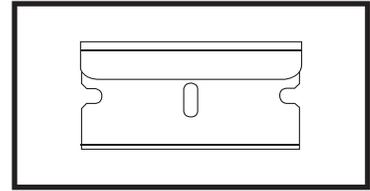



RAZOR BLADE

Step 1:

Installing the pieces of vinyl behind the quarter panel and on top of the wheel well. Set the back of the rear seat into position to insure the vinyl is covering the uncovered area. Once the vinyl is in proper place glue it into place and proceed to install.

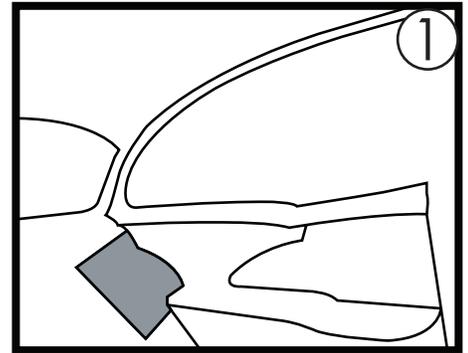


*****TMI Products Rear quater panels must be installed prior to installation of TMI Products complete rear seat*****

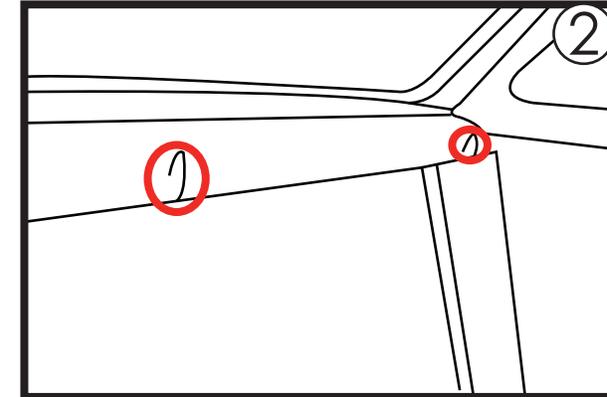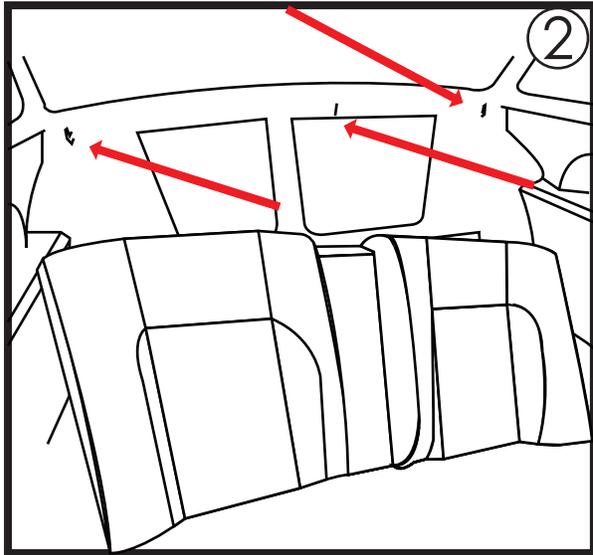


Step 2:

Installing the back rest of your rear seat. The backrest attaches with rear substrate hooks (pointed out with arrows in Picture 1). You will have to hook the seat onto the hooks at an angle then lower the backrest into position using a hinge type of motion.

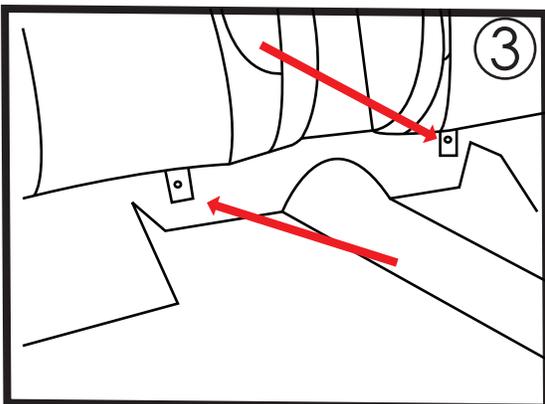


Step 3:

Screwing in the backrest. Once the backrest is in and laying on rear seat sub structure you will run the self tapping screws into the rear seat tabs. The screws go through two tabs located on the bottom of the backrest this is what will hold seat in place.

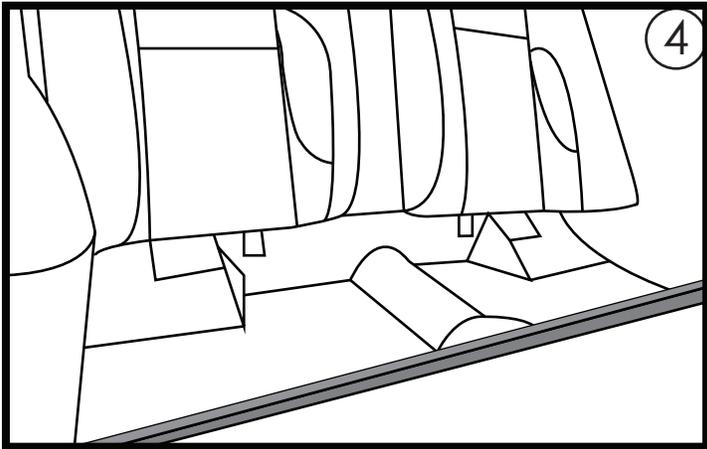

Step 4:

Installing the bottom of your rear seat. For this step you will need to note key features on your floor pan and rear seat bottom. On the floor pan there is a cross brace. (shaded in Picture 3) running from left to right. The seat has notches on both sides to match the cross brace so that it will fit over the cross brace.

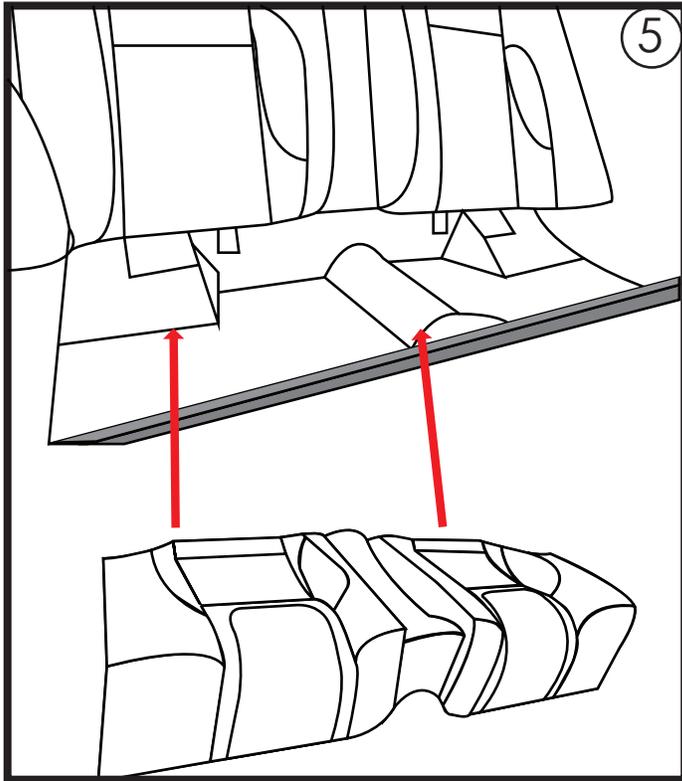

Step 5:

Slide the bottom of your rear seat into place. The seat will drop into place over that cross brace. The cross brace holds the bottom of the seat into place.

Step 6:

The rear seat center console will drop into place between the two rear seats.