



Bel Air Horn Ring


INSTRUCTIONS

1. First Remove Center Horn Cap. This is done by accessing the 10206 Center Cap Screw through the hole in lower steering wheel spoke. If still original you will need a clutch head drive to remove it. Next remove the Horn Contact Parts (see 882 Instruction to assist you).

2. Now reverse the process and install your New 252 Bel Air Horn Ring. This will be one of the finishing touches on your interior. 100% Made in the USA. See view below for assembly from the Steering Wheel to the Horn Cap Emblem.

NOTE:

See diagram below for other items you may need to get the assembly back to new condition.

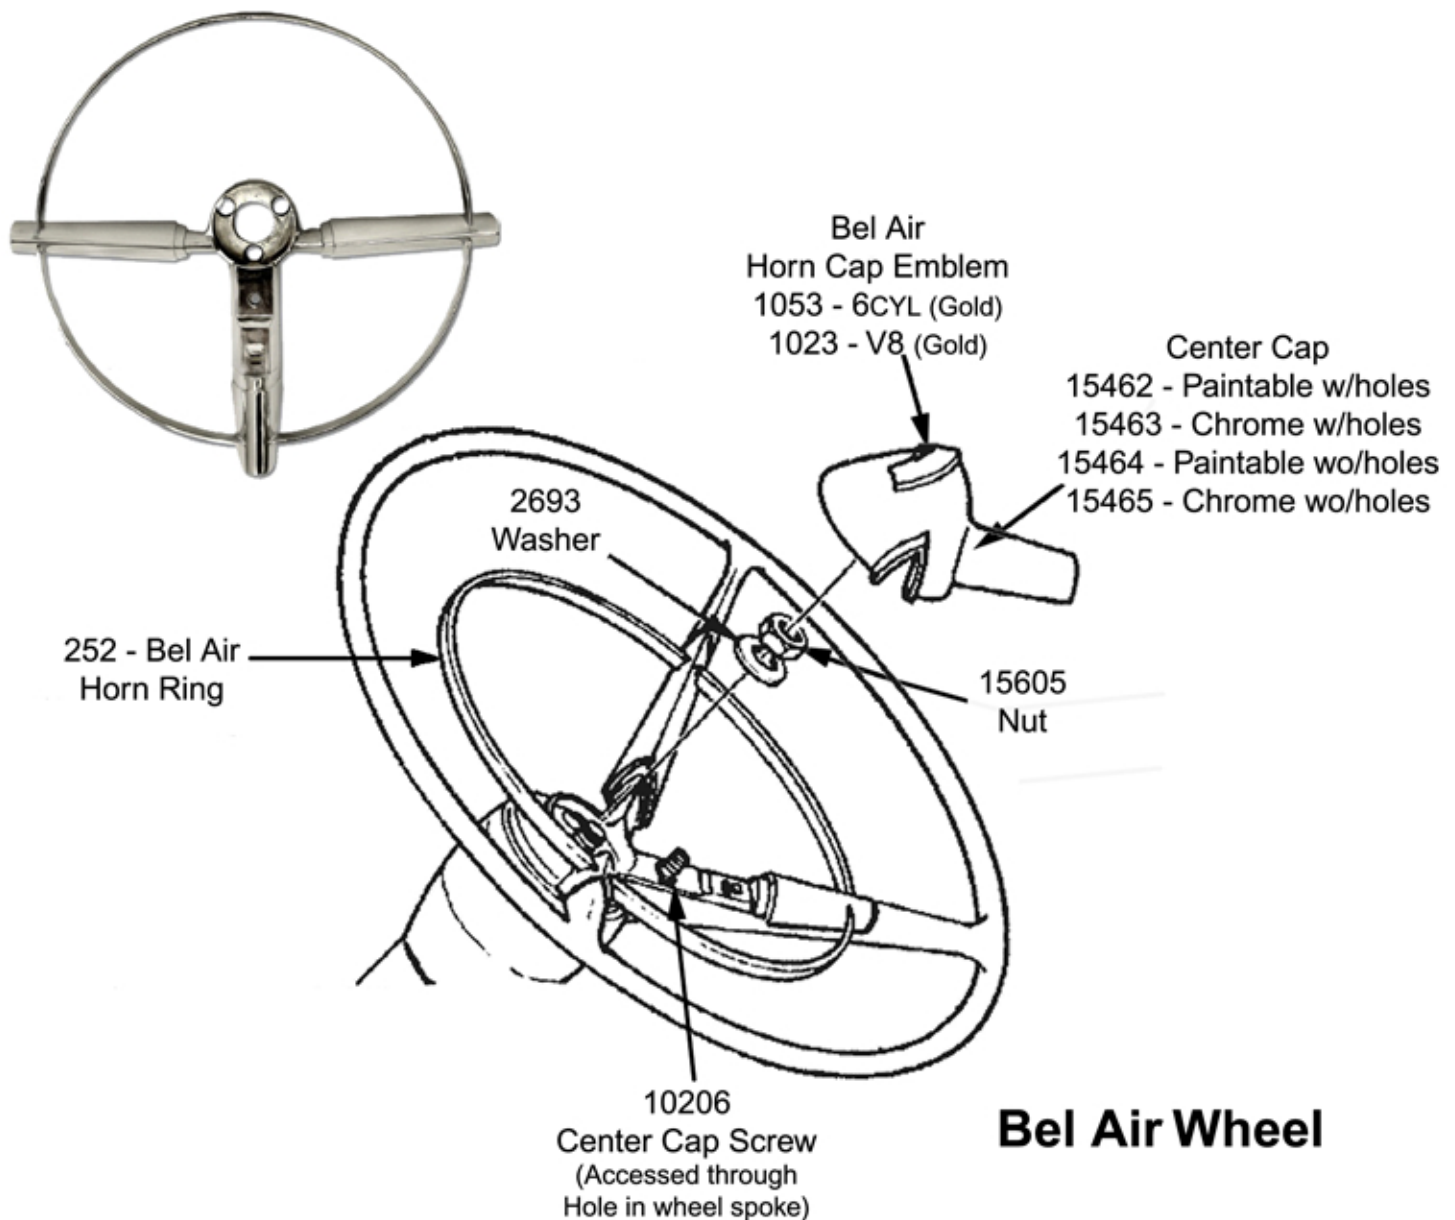

Bel Air Wheel